

Precision Fastening Tools  
 Visseuses de précision  
 Präzisions-Abschalterschrauber  
 Llaves de precisión  
 Avvitatori di precisione

**New**

**QA Series**




**Standard Equipment**

Lube free motor	Moteur non lubrifié	Ölfreier Motor	Motor sin lubricación	Motore senza lubrificazione
Data collection output for cycle counting	Prise d'info. pour comptage de cycles	Verschraubungszähler	Salida para conteo de ciclos	Presencia segnale per conteggio cicli
Double axial inlet	Double alimentation axiale	Doppelter Lufteinlass	Doble entrada de aire en línea	Doppia alimentazione assiale
19 mm adjustable floating spindle	Broche télescopique réglable 19 mm	Einstellbare Gleitspindel (19 mm)	Husillo telescópico (19 mm)	Albero telescopico regolabile (19 mm)



Specifications at 90 psi – Caractéristiques à 620 kPa – Technische Daten bezogen auf 620 kPa  
 Especificaciones a 620 kPa – Caratteristiche a 620 kPa


Connection  
 Connexion  
 Anschluss  
 Conexión  
 Attacco




Fixtured Wrenches  
 Broches de Vissage  
 Einbau-Druckluftschrauber  
 Husillos de Atornillado  
 Chiavi per Installazioni Fisse



QA8ASRS090BF41S08

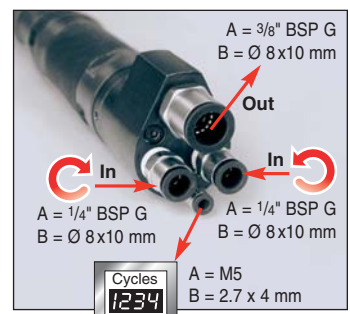

4



Adjustable shut-off clutch models — Modèles avec limiteur de couple réglable à coupure d'air — Modelle mit einstellbarer Abschaltkupplung — Modelos con parada automática — Modelli con frizione regolabile con blocco aria

Ref.	Nm	rpm	kg	mm	mm	in	l/min
<b>LEVER START — DÉM. PAR LEVIER — HEBELSTART — ARRANQUE POR PALANCA — AVVIAMENTO A LEVA</b>							
QA4ASRS012BF41S06	6-12	1050	1.30	451	21	3/8	820
QA4ASRS015BF41S06	7-15	850	1.30	451	21	3/8	820
QA4ASRS020BF41S06	10-20	600	1.40	451	21	3/8	820
QA4ASRS027BF41S06	14-27	450	1.40	451	21	3/8	820
QA4ASRS046BF41S06	20-46	250	1.50	465	23	3/8	820
QA6ASRS025BF41S06	12-25	700	2.61	454	34	3/8	1020
QA6ASRS030BF41S06	15-30	585	2.61	454	34	3/8	1020
QA6ASRS040BF41S06	20-40	435	2.61	454	34	3/8	1020
QA6ASRS055BF41S08	25-55	315	2.62	454	34	1/2	1020
QA8ASRS040BF41S06	20-40	540	2.73	478	34	3/8	1300
QA8ASRS055BF41S08	25-55	425	2.74	478	34	1/2	1300
QA8ASRS070BF41S08	35-70	320	3.09	482	43	1/2	1300
QA8ASRS090BF41S08	45-90	230	3.42	518	43	1/2	1300
QA8ASRS115BF41S08	70-115	195	3.64	517	51	1/2	1300
QA8ASRS180BF41S08	90-180	125	3.64	517	51	1/2	1300

Series / Baureihe	79 dBa	1/4 BSP	10 mm
QA4	79 dBa	1/4 BSP	10 mm
QA6	82 dBa	3/8 BSP	13 mm
QA8	87 dBa	3/8 BSP	13 mm



Fixtured Angle Wrenches also available: Please consult our Solutions Center.  
 Pour les broches de vissage d'angle, consulter notre Solution Center.  
 Einbauspindeln mit Winkelkopf: konsultieren Sie unsere Solution Center.  
 Llaves angulares fijas: Pongase en contacto con su Solution Center.  
 Chiavi ad angolo per installazioni fisse: contattare il Solution Center.